

Horizontal with bracket tact switch, DIP tact switch, 2 Pin DIP tact switch, SMD surface mounted tact switch, DIP with ground terminal tact switch.

 <u>WKTA1060060C</u>	 <u>WKTA1045045A</u>	 <u>WKTA2060060E</u>	 <u>WKTA1060060A</u>	 <u>WKTA1060060E</u>	 <u>WKTZ6060060A</u>
 <u>WKTR1072068A</u>	 <u>WKTR3060060A</u>	 <u>WKTS1020040E</u>	 <u>WKTS1060060B</u>	 <u>WKTS2040040D</u>	 <u>WKTS1020040D</u>
 <u>WKTS1030030D</u>	 <u>WKTS2030030D</u>	 <u>WKTS2020040D</u>	 <u>WKTS2035060D</u>	 <u>WKTS1035060D</u>	 <u>WKTS1045045D</u>
 <u>WKTS2050050D</u>	 <u>WKTS1120120D</u>	 <u>WKTS2060060D</u>	 <u>WKTS9060060D</u>	 <u>WKTS7060060D</u>	 <u>WKTS4060060D</u>

FEATURES:

They have a small footprint and come in many sizes and gram forces.

APPLICATIONS:

Instrument, industrial control, communication equipment, computer, Safety systems, household appliances, automobiles, audio-visual equipment and pagers, etc.

SOLDERING CONDITIONS:

1. Condition for Reflow:


Available for Surface Mount Type.

2. Conditions for Auto-dip:

Available for Snap-in Type and Radial Type.

(DIP: Snap-in Type & Radial Type SMD: Surface Mount Type)



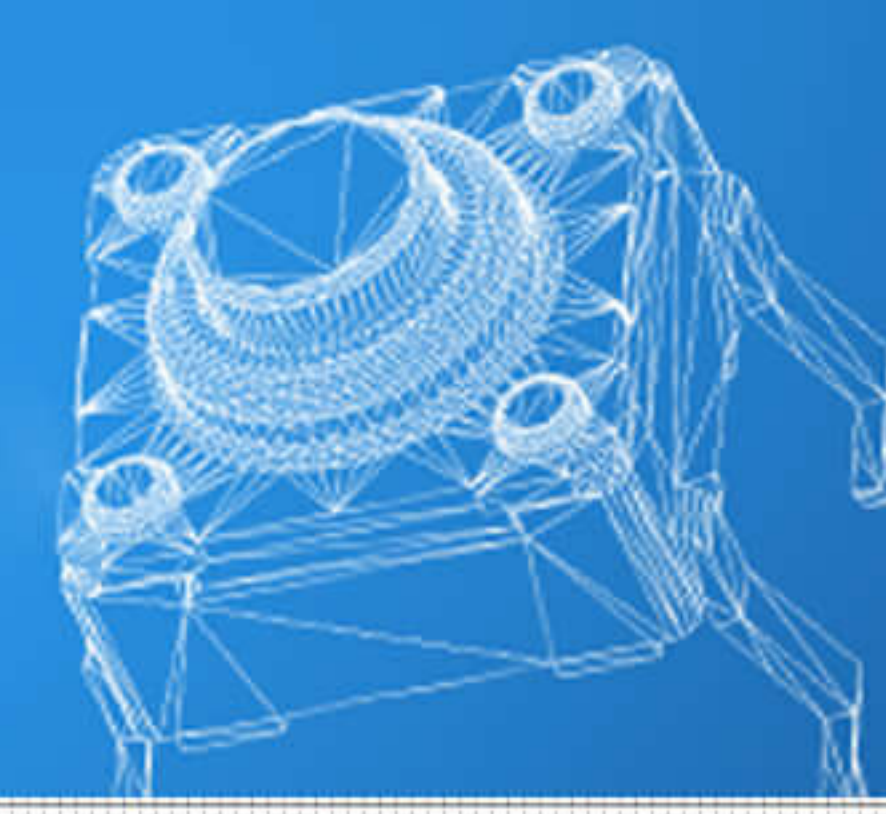

■ TACT SWITCHES - DIP TYPE

KINGTRONICS P/N	OPERATING FORCE	OPERATING LIFE CYCLES	FULL TRAVEL
WKTA1060060C	1.6±0.5N	80000	0.25±0.1mm
WKTA1045045A	1.0±0.3N, 1.6±0.5N, 2.6±0.5N	40000, 50000, 60000	0.25±0.1mm
WKTA2060060E	1.0±0.3N, 1.6±0.5N	100000	0.25±0.1mm
WKTA1060060A	1.0±0.3N, 1.6±0.5N, 2.6±0.5N	60000, 80000, 100000	0.25±0.1mm
WKTA1060060E	1.0±0.3N, 1.6±0.5N, 2.6±0.5N	60000, 80000, 100000	0.25±0.1mm
WKTZ6060060A	2.6±0.5N	100000	0.25±0.1mm
WKTR1072068A	2.0±0.5N	500000	0.25±0.1mm
WKTR3060060A	2.6±0.5N	500000	0.25±0.1mm
WKTS1020040E	1.8±0.5N	50000	0.15±0.05mm
WKTS1060060B	1.6±0.5N	100000	1.3±0.2mm

■ TACT SWITCHES - SMD TYPE

KINGTRONICS P/N	OPERATING FORCE	OPERATING LIFE CYCLES	FULL TRAVEL
WKTS2040040D	1.6±0.3N	200000	0.15±0.1mm
WKTS1020040D	1.6±0.5N	200000	0.2±0.1mm
WKTS1030030D	1.6±0.5N, 2.6±0.5N	30000, 40000, 50000	0.2±0.1mm
WKTS2030030D	1.6±0.5N, 2.6±0.5N	30000, 40000, 50000	0.2±0.1mm
WKTS2020040D	2.3±0.3N	200000	0.15±0.05mm
WKTS2035060D	1.6±0.5N	50000	0.25±0.1mm
WKTS1035060D	1.6±0.5N	50000	0.25±0.1mm
WKTS1045045D	1.0±0.3N, 1.6±0.5N, 2.6±0.5N	80000	0.25±0.1mm
WKTS2050050D	2.6±0.5N	100000	0.25±0.1mm
WKTS1120120D	1.0±0.3N, 1.6±0.5N, 2.6±0.5N	50000, 80000, 100000	0.25±0.1mm
WKTS2060060D	1.0±0.3N, 1.6±0.5N, 2.6±0.5N	50000, 80000, 100000	0.25±0.1mm
WKTS9060060D	1.0±0.3N, 1.6±0.5N, 2.6±0.5N	50000, 80000, 100000	0.25±0.1mm
WKTS7060060D	2.6±0.5N	60000	0.25±0.1mm
WKTS4060060D	1.6±0.5N	80000	0.25±0.1mm