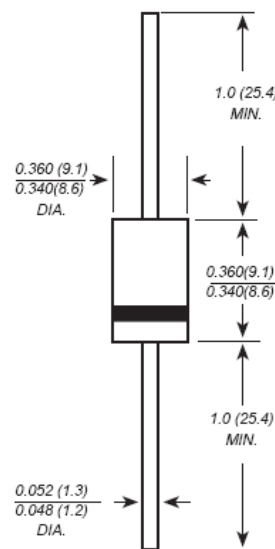


**Kingtronics**®**6A05 THRU  
6A10****GENERAL PURPOSE SILICON RECTIFIER****Reverse Voltage - 50 to 1000 Volts Forward Current - 6.0 Amperes****FEATURES**

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Construction utilizes void-free molded plastic technique
- ◆ Low reverse leakage
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed:  
250°C/10 seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension

**MECHANICAL DATA****Case:** R-6 molded plastic body**Terminals:** Plated axial leads, solderable per MIL-STD-750, Method 2026**Polarity:** Color band denotes cathode end**Mounting Position:** Any**Weight:** 0.072 ounce, 2.05 grams**R-6**

Dimensions in inches and (millimeters)

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

	SYMBOLS	6A05	6A1	6A2	6A4	6A6	6A8	6A10	UNITS
Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	200	400	600	800	1000	VOLTS
Maximum RMS voltage	$V_{RMS}$	35	70	140	280	420	560	700	VOLTS
Maximum DC blocking voltage	$V_{DC}$	50	100	200	400	600	800	1000	VOLTS
Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_A=60^\circ\text{C}$	$I_{(AV)}$				6.0				Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$				400				Amps
Maximum instantaneous forward voltage at 6.0A	$V_F$				0.95				Volts
Maximum DC reverse current $T_A=25^\circ\text{C}$ at rated DC blocking voltage $T_A=100^\circ\text{C}$	$I_R$				10.0				mA
Typical junction capacitance (NOTE 1)	$C_J$				150				pF
Typical thermal resistance (NOTE 2)	$R_{\theta JA}$				10.0				$^\circ\text{C}/\text{W}$
Operating junction and storage temperature range	$T_J, T_{STG}$				-65 to +175				$^\circ\text{C}$

**Note:** 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

2. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted

**Kingtronics**® International CompanyWebsite: [www.kingtronics.com](http://www.kingtronics.com)Email: [info@kingtronics.com](mailto:info@kingtronics.com)







Tel: (852) 8106 7033

Fax: (852) 8106 7099

# Kingtronics®

# 6A05 THRU 6A10

## RATINGS AND CHARACTERISTIC CURVES 6A05 THRU 6A10

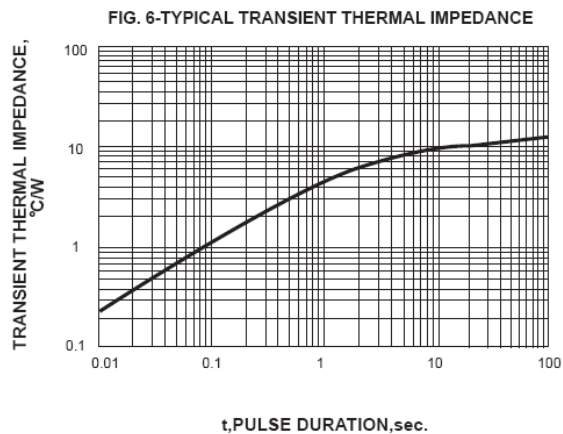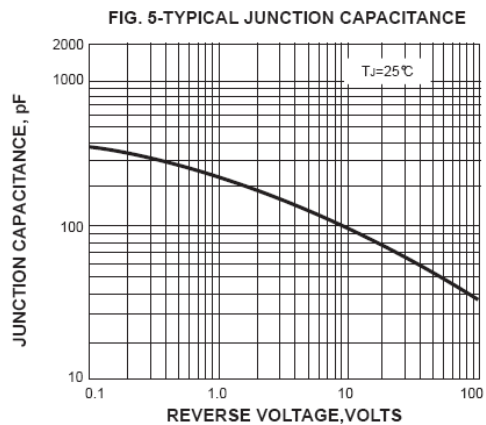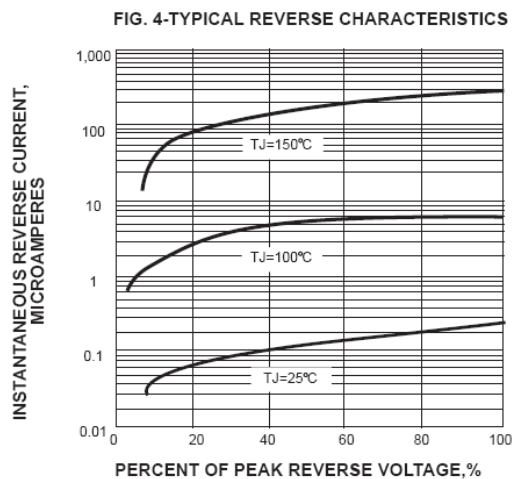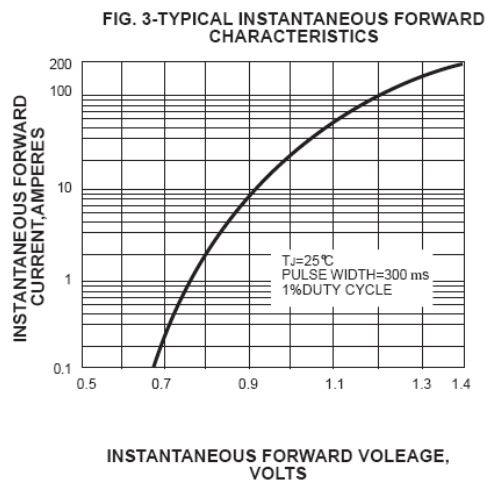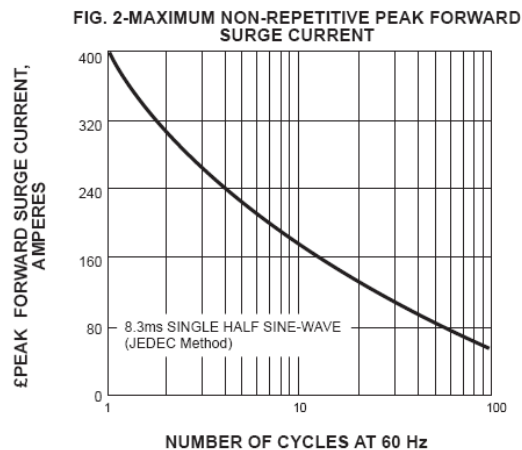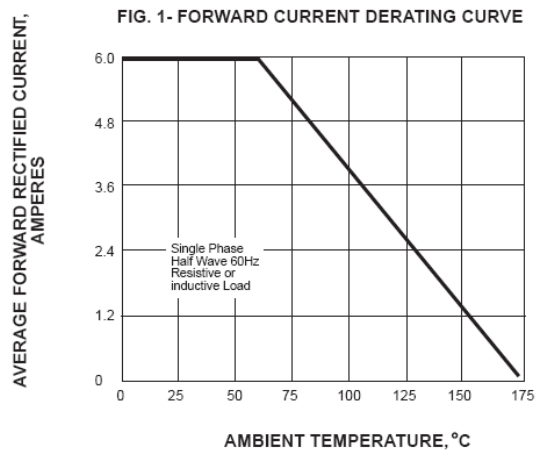

Note: Specifications are subject to change without notice.

**Kingtronics® International Company**