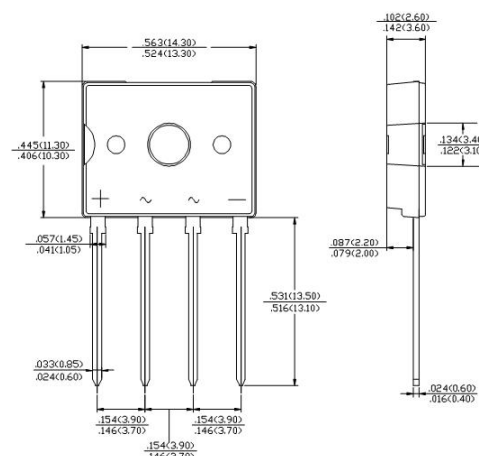


Kingtronics®**D2UB05 THRU
D2UB100****Single Phase 2.0 AMPS. Glass Passivated Bridge Rectifiers**
Voltage Range 50 to 1000 Volts Current 2.0 Amperes**FEATURES**

- ◆ Ideal for printed circuit boards
- ◆ Reliable low cost construction technique results in inexpensive product
- ◆ High temperature soldering guaranteed:
260°C/10 seconds
- ◆ UL Recognized File number: E347214

MECHANICAL DATA

- ◆ Case: Molded plastic
- ◆ Lead: solder plated
- ◆ Polarity: As marked on body
- ◆ Mounting Torque: 0.8N-m
- ◆ Recommended Torque: 0.5N-m

Package: D3K

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%

Type Number		D2UB	D2UB	D2UB	D2UB	D2UB	D2UB	D2UB	UNITS
		05	10	20	40	60	80	100	
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current at	I _{F(AV)}				2.0 ⁽¹⁾				A
					1.0 ⁽²⁾				
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I _{FSM}				35				A
Maximum Instantaneous Forward Voltage @ 2A	V _F				1.1				V
Rating for fusing (3ms≤t<8.3ms) T _J =25°C	I ² t				3.5				A ² sec
Maximum DC Reverse Current @ T _A =25°C	I _R				5.0				μA
Typical Thermal Resistance (Note)	R _{θJA}				40				°C/W
	R _{θJC}				3.5				
Operating Temperature Range	T _J				-55 to +150				°C
Storage Temperature Range	T _{STG}				-55 to +150				°C

NOTE: 1. Unit case mounted on 1.6*1.6*0.06" thick (5.1*5.1*0.15cm) Al.Plate

2. Unit mounted on P.C.B. with 0.5*0.5" (12.7*1.27mm) copper pads and 0.375" (9.5mm) lead length

Kingtronics® International CompanyWebsite: www.kingtronics.comEmail: info@kingtronics.com

Tel: (852) 8106 7033

Fax: (852) 8106 7099

Kingtronics®

D2UB05 THRU D2UB100

RATING AND CHARACTERISTIC CURVES D2UB05 THRU D2UB100

FIG. 1-MAXIMUM NONO-REPETITIVE FORWARD SURGE CURRENT

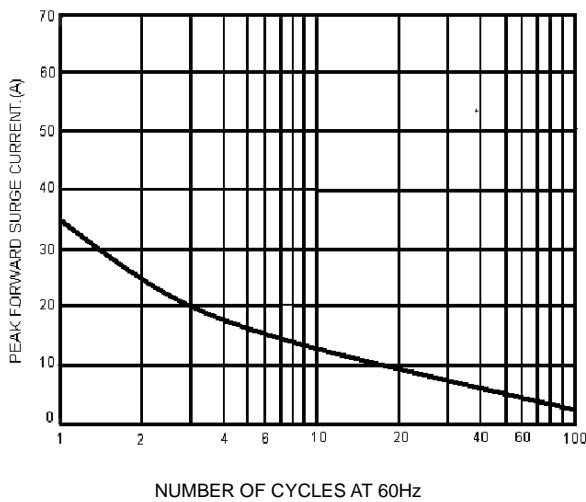


FIG. 2-MAXIMUM FORWARD CURRENT DERATING CURVE

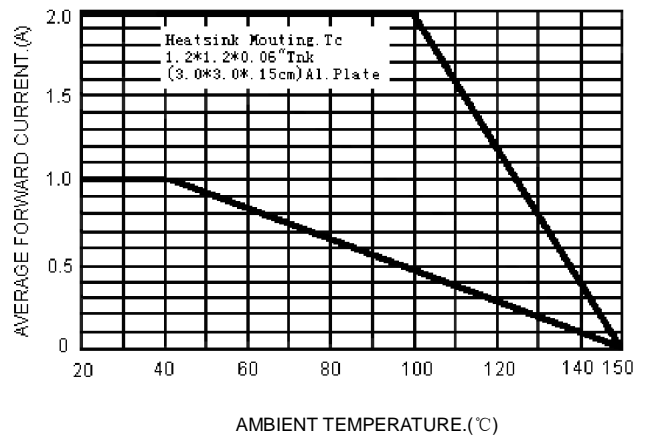


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER BRIDGE ELEMENT


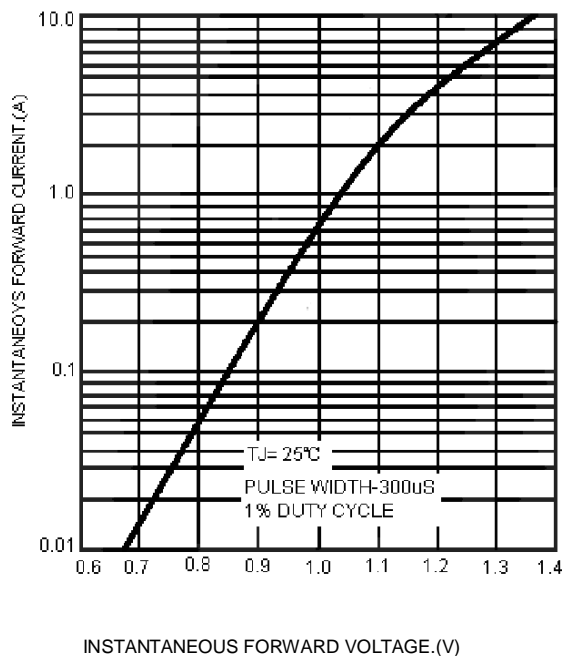


FIG. 4-TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT

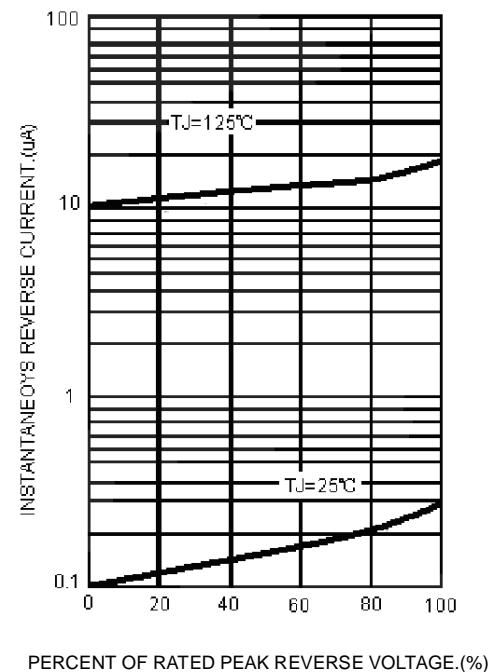

Note: Specifications are subject to change without notice.

Kingtronics® International Company