

# Kingtronics®

# GKT-CA

## Aluminum Electrolytic Capacitor— Screw

### FEATURES


- ◆ Load life of 2000 hours at 85°C
- ◆ Miniaturized
- ◆ High ripple current
- ◆ Used for computers, communication powers and inverters



### SPECIFICATIONS

OPERATING TEMPERATURE RANGE (°C)	-40°C ~ +85°C (315WV, -25°C ~ +85°C)	
CAPACITANCE TOLERANCE (25°C, 120Hz)	±20%	
LEAKAGE CURRENT (µA)	0.02CV or 5mA whichever is smaller. (25°C, after 5 minutes) C: Nominal Capacitance (µF) V: Rated Voltage (V)	
DISSIPATION FACTOR	See Standard Ratings Table	
LOAD LIFE (+85°C)	Time	2000hours
	Leakage Current	Not more than the specified value.
	Capacitance Change	Within±20% of the initial value
	Dissipation Factor	Not more than 200% of the specified value.
	Time	1000hours
SHELF LIFE (+85°C)	Leakage Current	Not more than the specified value.
	Capacitance Change	Within±20% of the initial value
	Dissipation Factor	Not more than 200% of the specified value.
	After test: U <sub>R</sub> to be applied for 60 minutes, 24 to 48 hours before measurement.	

### DIMENSIONS (mm)

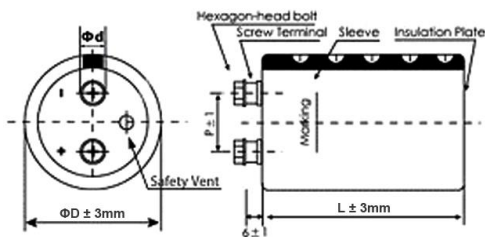

ΦD	36	51	63.5	78	89
F	13	22	28	32	32

ΦD	36	51-90
Φd	8.0	10.0

### MULTIPLIER FOR RIPPLE CURRENT

Frequency Coefficient									
Frequency(Hz)	Rated Voltage(V)	50	120	300	1K	3K	5K	10K	20K
10 ~ 50		0.95	1	1.04	1.10	1.12	1.13	1.15	1.15
63 ~ 100		0.95	1	1.06	1.16	1.20	1.25	1.30	1.363
160 ~ 200		0.90	1	1.10	1.20	1.35	1.40	1.50	1.55
250 ~ 450		0.80	1	1.10	1.20	1.35	1.40	1.50	1.55

Temperature Coefficient					
Temperature(°C)	Rated Voltage(V)	+40	+55	+70	+85
10 ~ 100		2.1	1.8	1.5	1
160 ~ 450		2.6	2.2	1.7	1

### CASE CODE

ΦD \ L	53	63	72	80	90	100	115	120	130	140	160
36	A5	A6	A7	A8	A9	A10	A11	A12	--	--	--
51	--	C6	C7	C8	C9	C10	C11	C12	C13	--	--
63.5	--	--	D7	D8	D9	D10	D11	D12	D13	D14	--
76	--	--	--	E8	E9	E10	E11	E12	E13	E14	E16
89	--	--	--	F8	F9	F10	F11	F12	F13	F14	F16

**Kingtronics® International Company**

Website: [www.kingtronics.com](http://www.kingtronics.com) Email: [info@kingtronics.com](mailto:info@kingtronics.com) Tel: (852) 8106 7033 Fax: (852) 8106 7099

**Kingtronics**®**GKT-CA**

Aluminum Electrolytic Capacitor– Screw

**STANDARD RATINGS**

Rated Voltage (V.DC)	Surge Voltage (V.DC)	Rated Capacitance ( $\mu$ F)	Dissipation Factor MAX	Ripple Current 85°C 120Hz	Outline Size	
					Code	ØDxL(mm)
10	13	33000	0.80	4.3	A5	36x53
		39000	0.80	4.7	A5	36x53
		47000	0.80	5.2	A6	36x65
		56000	0.80	6.1	A8	36x83
		68000	0.80	6.7	A8	36x83
		82000	0.80	7.7	A10	36x100
		100000	0.80	8.8	A10	36x100
		120000	0.80	10.0	A12	36x121
		150000	1.00	10.8	A12	36x121
		180000	1.00	12.0	C10R	51x96
		220000	1.50	11.2	C12	51x121
		270000	1.50	12.8	C12	51x121
		330000	1.50	15.3	D10R	64x96
		390000	1.50	17.3	D12R	64x115
		470000	2.00	16.7	D13R	64x130
		560000	2.00	19.0	E12R	77x115
680000	2.00	21.7	E13R	77x130		
820000	2.00	24.7	E16R	77x155		
16	20	22000	0.60	4.1	A5	36x53
		27000	0.60	4.5	A5	36x53
		33000	0.60	5.0	A5	36x53
		39000	0.60	5.9	A6	36x65
		47000	0.60	6.4	A8	36x83
		56000	0.60	7.3	A8	36x83
		68000	0.60	8.4	A10	36x100
		82000	0.80	8.3	A10	36x100
		100000	0.80	9.5	A12	36x121
		120000	0.80	10.9	A12	36x121
		150000	1.00	11.3	C10R	51x96
		180000	1.00	12.8	C12R	51x115
		220000	1.00	15.3	C13R	51x130
		270000	1.00	17.6	D10R	64x96
		330000	1.50	16.8	D12R	64x115
		390000	1.50	18.3	D13R	61x130
470000	1.50	21.3	E12R	77x115		
560000	1.50	23.6	E13R	77x130		
680000	1.50	27.6	E16R	77x115		
820000	2.00	27.1	F16R	90x157		
25	32	15000	0.50	3.7	A5	36x53
		18000	0.50	4.1	A5	36x53
		22000	0.50	4.5	A5	36x53
		27000	0.50	5.0	A6	36x65
		33000	0.50	5.9	A8	36x83
		39000	0.50	6.7	A8	36x83
		47000	0.50	7.7	A10	36x100
		56000	0.60	7.9	A10	36x100
		68000	0.60	9.1	A12	36x121
		82000	0.60	10.4	A12	36x121
		100000	0.80	10.3	C10R	51x96
		120000	0.80	11.7	C12R	51x115
		150000	0.80	14.1	C13R	51x130
		180000	0.80	15.7	D10R	64x96
		220000	1.00	16.1	D12R	64x115
		270000	1.00	18.6	D13R	64x130
330000	1.00	21.9	D16R	64x155		
390000	1.20	22.0	E12R	77x115		
470000	1.20	25.6	E16R	77x115		
560000	1.20	27.9	F13R	90x131		
680000	1.20	32.5	F16R	90x157		

**Kingtronics**® International CompanyWebsite: [www.kingtronics.com](http://www.kingtronics.com)Email: [info@kingtronics.com](mailto:info@kingtronics.com)

Tel: (852) 8106 7033

Fax: (852) 8106 7099

# Kingtronics®

# GKT-CA

## Aluminum Electrolytic Capacitor– Screw

### STANDARD RATINGS

Rated Voltage (V.DC)	Surge Voltage (V.DC)	Rated Capacitance (µF)	Dissipation Factor MAX	Ripple Current 85°C 120Hz	Outline Size	
					Code	ØDxL(mm)
35	44	10000	0.40	3.4	A5	36x53
		12000	0.40	3.7	A5	36x53
		15000	0.40	4.2	A6	36x65
		18000	0.40	4.9	A8	36x83
		22000	0.40	5.7	A8	36x83
		27000	0.40	6.3	A10	36x100
		33000	0.40	7.2	A10	36x100
		39000	0.50	7.3	A12	36x121
		47000	0.50	8.7	C10R	51x96
		56000	0.60	8.6	C10R	51x96
		68000	0.60	9.8	C12R	51x115
		82000	0.60	11.6	D10R	64x96
		100000	0.60	13.3	D12R	64x115
		120000	0.60	14.8	D12	64x121
		150000	0.80	14.9	D13R	64x130
		180000	0.80	17.0	E12R	77x115
		220000	0.80	20.0	E13R	77x130
		270000	1.00	20.3	E16R	77x155
		330000	1.00	23.5	F13R	90x131
		390000	1.00	26.4	F16R	90x157
470000	1.00	29.6	F16R	90x157		
50	63	5600	0.30	3.0	A5	36x53
		6800	0.30	3.3	A5	36x53
		8200	0.30	3.6	A5	36x53
		10000	0.30	4.0	A6	36x65
		12000	0.30	4.7	A8	36x83
		15000	0.30	5.5	A8	36x83
		18000	0.30	6.2	A10	36x100
		22000	0.40	6.3	A12	36x121
		27000	0.40	7.1	A12	36x121
		33000	0.40	8.2	C10R	51x96
		39000	0.50	8.1	C10R	51x96
		47000	0.50	9.3	C12R	51x115
		56000	0.50	10.5	D10R	64x96
		68000	0.50	12.0	D10R	64x96
		82000	0.50	13.7	D12R	64x115
		100000	0.60	14.7	E12R	77x115
		120000	0.60	16.7	E12	77x115
		150000	0.60	19.3	E13R	77x130
		180000	0.60	21.9	E16R	77x155
		220000	0.60	21.4	F13R	90x131
270000	0.60	24.6	F16R	90x157		
63	79	3900	0.25	2.7	A5	36x53
		4700	0.25	3.0	A5	36x53
		5600	0.25	3.3	A5	36x53
		6800	0.25	3.6	A6	36x65
		8200	0.25	4.3	A8	36x83
		10000	0.25	4.9	A8	36x83
		12000	0.25	5.6	A10	36x100
		15000	0.30	5.9	A10	36x100
		18000	0.30	6.7	A12	36x121
		22000	0.30	7.8	A12	36x121
		27000	0.40	7.4	C10R	51x96
		33000	0.40	8.4	C10R	51x96
		39000	0.40	9.5	C12R	51x115
		47000	0.40	11.3	C13R	51x130
		56000	0.40	12.8	D12R	64x115
		68000	0.50	12.7	D12	64x121
		82000	0.50	14.5A5	D13R	64x130
		100000	0.50	16.7	E12R	77x115
		120000	0.50	18.9	E13R	77x130
		150000	0.50	22.4	E16R	77x155
180000	0.60	22.4	F13R	90x131		
220000	0.60	26.2	F16R	90x157		

**Kingtronics® International Company**

Website: [www.kingtronics.com](http://www.kingtronics.com) Email: [info@kingtronics.com](mailto:info@kingtronics.com) Tel: (852) 8106 7033 Fax: (852) 8106 7099

# Kingtronics®

# GKT-CA

## Aluminum Electrolytic Capacitor– Screw

### STANDARD RATINGS

Rated Voltage (V.DC)	Surge Voltage (V.CD)	Rated Capacitance (µF)	Dissipation Factor MAX	Ripple Current 85°C 120Hz	Outline Size	
					Code	ØDxL(mm)
80	100	3300	0.25	2.5	A5	36x53
		3900	0.25	2.8	A5	36x53
		4700	0.25	3.0	A6	36x65
		5600	0.25	3.6	A8	36x83
		6800	0.25	3.9	A8	36x83
		8200	0.25	4.5	A8	36x83
		10000	0.25	5.2	A10	36x100
		12000	0.25	5.9	A10	36x100
		15000	0.25	6.8	A12	36x121
		18000	0.25	7.8	A12	36x121
		22000	0.30	8.0	C10R	51x96
		27000	0.30	9.2	C10R	51x96
		33000	0.30	10.5	C12R	51x115
		39000	0.30	12.0	C13R	51x130
		47000	0.30	13.6	D12R	64x115
		56000	0.40	13.4	D13R	64x130
		68000	0.40	15.4	E12R	77x115
		82000	0.40	17.5	E13R	77x130
100000	0.40	20.5	E16R	77x155		
120000	0.40	22.4	F13R	90x131		
150000	0.40	26.5	F16R	90x157		
100	125	1800	0.25	1.9	A5	36x53
		2200	0.25	2.1	A5	36x53
		2700	0.25	2.3	A5	36x53
		3300	0.25	2.6	A6	36x65
		3900	0.25	3.0	A8	36x83
		4700	0.25	3.5	A8	36x83
		5600	0.25	3.9	A10	36x100
		6800	0.25	4.5	A10	36x100
		8200	0.25	5.1	A12	36x121
		10000	0.25	5.9	A12	36x121
		12000	0.25	6.4	C8R	51x75
		15000	0.25	7.0	C10R	51x96
		18000	0.25	8.3	C12R	51x115
		22000	0.25	10.0	C13R	51x130
		27000	0.25	11.5	D12R	64x115
		33000	0.25	11.9	D13R	64x130
		39000	0.25	13.4	E12R	77x115
		47000	0.35	14.2	E13R	77x130
		56000	0.35	16.0	E16R	77x155
		68000	0.35	18.8	F13R	90x131
82000	0.35	20.5	F16R	90x157		
100000	0.35	24.0	F17R	90x171		
160	200	3300	0.25	5.18	A12	36x121
		3900	0.25	5.33	C8R	51x75
		4700	0.25	5.85	C8R	51x75
		5600	0.25	7.03	C10R	51x96
		6800	0.25	7.77	C10R	51x96
		8200	0.25	9.14	C12R	51x115
		10000	0.25	10.36	D10R	64x96
		12000	0.25	11.32	D10R	64x96
		15000	0.25	14.28	D13R	64x130
		18000	0.25	15.61	D13R	64x130
		22000	0.25	18.28	E13R	77x130
		27000	0.25	20.24	E13R	77x130
33000	0.25	23.75	E13R	90x131		
39000	0.25	27.86	F16R	90x157		
200	250	2200	0.25	3.92	A10	36x100
		2700	0.25	4.70	A12	36x121
		3300	0.25	4.92	C8R	51x75
		3900	0.25	5.33	C8R	51x75
		4700	0.25	6.44	C10R	51x96
		5600	0.25	7.55	C12R	51x115
		6800	0.25	8.77	C13R	51x130
		8200	0.25	9.40	D10R	64x96
		10000	0.25	10.36	D10R	64x96
		12000	0.25	12.06	E10R	77x96
		15000	0.25	14.43	E10R	77x96
		18000	0.25	16.50	E13R	77x130
		22000	0.25	19.61	E16R	77x155
		27000	0.25	21.51	F13R	90x131
		33000	0.25	25.53	F16R	90x157

**Kingtronics® International Company**

# Kingtronics®

# GKT-CA

## Aluminum Electrolytic Capacitor– Screw

### STANDARD RATINGS

Rated Voltage (V.DC)	Surge Voltage (V.DC)	Rated Capacitance (µF)	Dissipation Factor MAX	Ripple Current 85°C 120Hz	Outline Size	
					Code	ØDxL(mm)
250	300	1500	0.25	3.22	A10	36x100
		1800	0.25	3.52	A10	36x100
		2200	0.25	4.00	C8R	51x75
		2700	0.25	4.44	C8R	51x75
		3300	0.25	5.40	C10R	51x96
		3900	0.25	6.29	C12R	51x115
		4700	0.25	7.10	D10R	64x96
		5600	0.25	7.77	D10R	64x96
		6800	0.25	9.14	D12R	64x115
		8200	0.25	10.03	D12R	64x115
		10000	0.25	11.66	D13R	64x130
		12000	0.25	12.88	E12R	77x115
		15000	0.25	15.10	E13R	77x130
		18000	0.25	17.69	E16R	77x155
		22000	0.25	20.91	F16R	90x157
350	400	390	0.20	1.67	A5	36x53
		470	0.20	2.15	A8	36x83
		560	0.20	2.37	A8	36x83
		680	0.20	2.59	A8	36x83
		820	0.20	3.07	A10	36x100
		1000	0.20	3.41	A10	36x100
		1200	0.20	3.81	C8R	51x75
		1500	0.20	4.26	C8R	51x75
		1800	0.20	5.14	C10R	51x96
		2200	0.20	5.70	C10R	51x96
		2700	0.20	7.14	C13R	51x130
		3300	0.20	7.92	C13R	51x130
		3900	0.20	9.00	D12R	64x115
		4700	0.20	10.33	D13R	64x130
		5600	0.20	11.36	E12R	77x115
		6800	0.20	13.10	E13R	77x130
		8200	0.20	15.43	F16R	77x155
		10000	0.20	18.13	F16R	90x157
12000	0.20	20.02	F16R	90x157		
15000	0.20	24.50	F20R	90x196		
18000	0.20	28.83	F24R	90x236		
400	450	330	0.20	1.52	A5	36x53
		390	0.20	1.96	A8	36x83
		470	0.20	2.15	A8	36x83
		560	0.20	2.37	A8	36x83
		680	0.20	2.82	A10	36x100
		820	0.20	3.07	A10	36x100
		1000	0.20	3.48	C8R	51x75
		1200	0.20	3.82	C8R	51x75
		1500	0.20	4.70	C10R	51x96
		1800	0.20	5.15	C10R	51x96
		2200	0.20	6.44	C13R	51x120
		2700	0.20	6.96	D10R	64x96
		3300	0.20	8.22	D12R	64x115
		3900	0.20	9.40	D13R	64x130
		4700	0.20	10.44	E12R	77x115
5600	0.20	11.92	E13R	77x130		
6800	0.20	14.06	E16R	77x155		
8200	0.20	16.43	F16R	90x157		
10000	0.20	18.28	F16R	90x157		
12000	0.20	21.84	F20R	90x196		
15000	0.20	26.31	F24R	90x236		
450	500	270	0.20	1.37	A5	36x53
		330	0.20	1.82	A8	36x83
		390	0.20	1.96	A8	36x83
		470	0.20	2.15	A8	36x83
		560	0.20	2.55	A10	36x100
		680	0.20	2.81	A10	36x100
		820	0.20	3.18	C8R	51x75
		1000	0.20	3.48	C8R	51x75
		1200	0.20	4.22	C10R	51x96
		1500	0.20	5.07	C12R	51x115
		1800	0.20	5.85	C13R	51x130
		2200	0.20	6.29	D10R	64x96
		2700	0.20	7.48	D12R	64x115
		3300	0.20	8.66	D13R	64x130
		3900	0.20	9.47	E12R	77x115
		4700	0.20	10.88	E13R	77x130
		5600	0.20	12.80	E16R	77x155
		6800	0.20	15.00	F16R	90x157
		8200	0.20	16.50	F16R	90x157
		10000	0.20	20.00	F20R	90x196
12000	0.20	23.61	F24R	90x236		

**Kingtronics® International Company**

**Kingtronics**®**GKT-CA**

Aluminum Electrolytic Capacitor—Screw

**HOW TO ORDER**

<b>GKT</b>	<b>CA</b>	<b>0J</b>	<b>0R1</b>	<b>M</b>	<b>00500110</b>	<b>020</b>	<b>000</b>	<b>B</b>	<b>R</b>
Series	Sub Series	Rated Voltage	Capacitance	Capacitance Tolerance	Dimension	Pitch/Pins	Lead Length	Packing	Pb
		1.	2.	3.	4.	5.	6.	7.	8.

**NOTE:****1. Rated Voltage**

Code	0J	1A	1C	1D	1E	1V	1G	1H	1J	1K
Voltage	6.3V	10V	16V	20V	25V	35V	40V	50V	63V	80V

Code	2A	2B	2C	2K	2D	2E	2F	2U	2V	2G	2X	2W	2H	2Y
Voltage	100V	120V	160V	180V	200V	250V	315V	330V	350V	400V	420V	450V	500V	550V

**2. Capacitance**

Code	0R1	R22	R33	R47	010	2R2	3R3	4R7	100	220	330	470	101
Capacitance (µF)	0.1	0.22	0.33	0.47	1	2.2	3.3	4.7	10	22	33	47	100

Code	221	271	331	391	471	561	681	102	222	332	472	103	223
Capacitance (µF)	220	270	330	390	470	560	680	1000	2200	3300	4700	10000	22000

**3. Capacitance Tolerance**

Code	K	L	M	P	Q	R	T	U	V	H	F
Tolerance	±10%	±15%	±20%	+100-0%	+30-10%	+20-0%	+50-10%	+75-10%	+20-10%	+20-5%	+30-0

**4. Dimension**

Code	00500110	00630120	01250200	01600300	03500450
Dimension (mm)	5x11	6.3x12	12.5x20	16x30	35x45

**5. Pitch/Pins**

Code	020	025	035	050	075	100	127	4pins
Pitch (mm)/Pins	2.0	2.5	3.5	5.0	7.5	10.0	12.7	4PS

**6. Lead Length**

Code	000	040	045	050
Lead Length	Standard	4.0	4.5	5.0

**7. Packing**

Code	A	B
Packing	Ammo	Bulk

**8. Pb**

Code	L	R
Pb	Leaded	RoHS

Note: Specifications are subject to change without notice.

**Kingtronics**® International CompanyWebsite: [www.kingtronics.com](http://www.kingtronics.com)Email: [info@kingtronics.com](mailto:info@kingtronics.com)

Tel: (852) 8106 7033

Fax: (852) 8106 7099