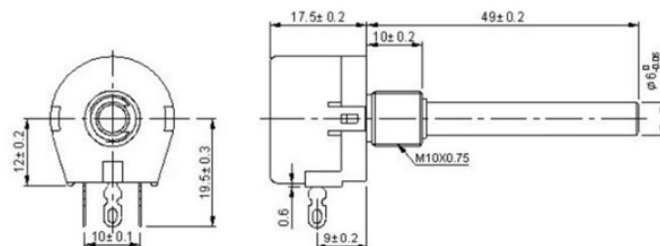


Kingtronics®**RKT-WX118**
Wirewound Potentiometer**Electrical Characteristics**

Range of nominal resistance	5Ω~22KΩ
Resistance tolerance	±5%
Terminal resistance	≤±0.2%R or 5Ω
Peak Noise	≤100Ω
Insulation resistance	≥ 200MΩ(100VAC)
Withstand voltage	500V(DC or AC peak value)
Electrical angle	258°±5°
Rated power	1W(300V 70°C)

Environment Characteristics

Temperature range	-55°C~+125°C
TCR	±100×10 ⁻⁶ /°C
Collision (390m/S ² , 4000 times)	ΔR≤±1%R
Vibration (10-500HZ, 0.75mm, 6h)	ΔR≤±1%R, ΔUab/Uac≤±2%R, Electrical break≤100μS
Temperature variation (-55°C/30min, +125°C/30min, 5cycles)	ΔR≤±2%R, ΔUab/Uac≤±2%R
Climate category (IEC68-2-2)	ΔR≤±(5%R+0.1Ω), Insulation Resistance≥100MΩ
Electrical endurance(2W,1000h)	ΔR≤± 3%R
Mechanical endurance(1000 cycles)	ΔR≤± (10%R+0.5Ω), CRV≤±3%R or 5Ω
Steady damp heat(IEC68-2-3, Ca, 96h)	ΔR≤± 3%R, Insulation Resistance≥100MΩ, starting torque ≤20mN.m

Common Dimensions**Physical Characteristics**

Total mechanical travel	300° ± 5 °
Rotational torque	2-10mN.m
Rotational torque	25 pcs /box

Note: Specifications are subject to change without notice.

Kingtronics® International CompanyWebsite: www.kingtronics.com Email: info@kingtronics.com Tel: (852) 8106 7033 Fax: (852) 8106 7099